

NOVALOOP Ring Light 120060-60-830-6600lm Dali



Product information "NOVALOOP Ring Light 120060-60-830-6600lm Dali"

Suspended LED ring light with Dali Dimming


Novaloop is a timeless, elegant ring luminaire made of aluminum extrusion profile: 60mm height and 35mm wide. Available in different dimensions from 400, 600, 800, 1000, 1200 and 1500mm. Suspension wire is 2000mm long.

This special edition is made to be used with 3-phase Dali track rails. The power supply will be placed into the track rail and is almost hidden in the profile due to its flat design. You can select one of the 3 possible power phases by a selector switch. The light output can be dimmed by DALI 2.0 signal. Novaloop is available in black and white housing. The light distribution is in one direction downwards. Standard CCTs are 3000K and 4000K other colours can be offered on demand. Standard CRI is 80Ra, we can offer CRI>90 but with lower light output.

With ceiling terminal box +2m ropes.

Applications:

Residential, shop, hotel, restaurant, office, meeting rooms, supermarket, exhibition and galleries

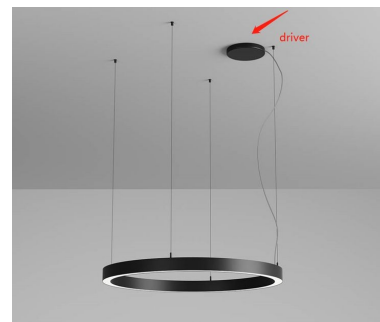

Technical Details:

Luminous Flux	6600 lm
Light Yield:	120 lm/W
Light Temperature:	3000 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	3
Power Consumption:	55 W
Power Factor (PF):	0.95
Operating Hours:	>100.000 h L80/B20
Switching Cycles:	>50.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-20°C - 45°C
Housing Material:	aluminum
Housing Color	black matt
Coating:	powder-coated
Dimensions	1200x60 mm
Cut-Out Dimensions	35 mm
Net Weight:	5670 g
Warranty	5 years

Information and Downloads:

