


LUNA PRO MKII 200-722/740-34000LM max. DIM

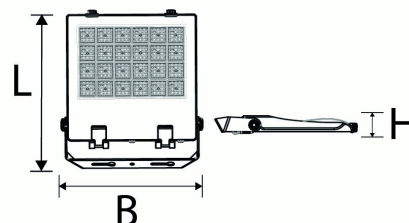

Technical Details:

Luminous Flux:	34000 lm
Light Yield:	170 lm/W
Light Temperature:	2200, 3000, 4000 K
Light Color:	dualwhite
Color Rendering Index:	≥70 Ra
Color Consistency (SDCM):	<5
Beam Angle:	145x70 °
Unified Glare Rating (UGR):	<24
Light Emission:	
Dimmable:	✓
Method of Dimming:	0-10V, 1-10V, PWM
Ignition Time:	<0,5 s
Power Consumption:	200 W
Contains Driver:	✓
Driver Manufacturer:	Sosen
Power Factor (PF):	>0.95
Input Driver:	cable with flying leads
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	cable with flying leads
Switching Cycles:	>100.000
Electrical Protection Class:	I
Ambient Temperature (TA):	-40°C - 50°C
Storage Temperature:	-40°C - 60°C

Dimensions:	452x338x131 mm
Mounting:	ceiling, wall, ground
Montageart:	surface mounted
Pivot Range tilt:	180 °
IP Class:	66
IK Code:	08
Housing Color	grey
Housing Material:	aluminum
Coating:	powder-coated
Special Feature of Housing:	Salzsprühtest 1000h
Cover:	Lens
Net Weight:	5800 g
Type of Packaging:	box
Content Master Package:	1
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	50.000 h L80/B20
Disposal Obligation:	✓
Customs Tariff Number:	9405421000
Certifications	CE, LM79, LM80
High System Efficiency:	max. 145 Lumen/Watt
Low Glare max. UGR:	<24 for Sportfield
2 x Kabel-Verschraubung + Air compensation valve	
werkzeuglos zu öffnen, andere Linsen optional	
tool free front opening, surge prediction 10KV SPD	

Information and Downloads:



