
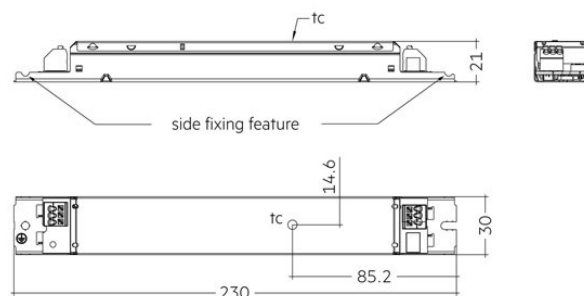


Tridonic TALEXXconverter LC75/350-500/216 flex CC Ip SNC4



Technical Details:

Input Current:	AC 198 - 264V, 50/60Hz
Power Consumption:	Power Select (350,400,450,500 mA W)
Driver Manufacturer:	Tridonic
Power Factor (PF):	>0.98
Input Driver:	terminal
Output of Driver:	DC 90-150/216V, 350-500mA
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	terminal
Switching Cycles:	>100.000
Electrical Protection Class:	I
Ambient Temperature (TA):	-25°C - 60°C
Storage Temperature:	-40°C - 80°C

Dimensions:	230x30x21 mm
IP Class:	20
Housing Color	white
Housing Material:	metal
Net Weight:	144 g
Type of Packaging:	box
Weight incl. Packaging:	0.144 kg
Content Master Package:	10
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	50.000 h
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE,ENEC
Standards:	EN 55015, EN 61000-3-2, EN 61000-3-3, N 61347-1, EN 61347-2-13, EN 61547, EN 62384

Information and Downloads:

