Technical Data Sheet

Order number: LG30804


LITEGEAR
LED Lighting Solutions

Plug and Play Emergency Kit für Retrova Extrem 3W/3h







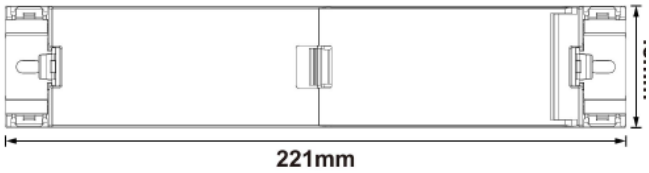



Technical Details:

Luminous Flux:	540 lm
Light Yield:	180 lm/W
Ignition Time:	<1 s
Input Current:	AC 220-240V, 50/60Hz
Power Consumption:	3 W
Driver Manufacturer:	Cyantronic
Input Driver:	cable with plug
Output of Driver:	DC 30-300V, 8-80mA
CC/CV:	CV
Ambient Temperature (TA):	0°C - 50°C
Storage Temperature:	-40°C - 60°C

Dimensions:	235x65x42 mm
Mounting:	ceiling,wall
Montageart:	recessed
IP Class:	20
Housing Color	white
Housing Material:	Blech-plastic
Special Feature of Housing:	steckbares System
Net Weight:	233 g
Luminaire Type:	Fluchtwegleuchtung
Testing Facility:	automatischer Selbsttest
Forward Voltage Range:	144-187
Battery Warranty:	2
Discharge Duration:	≥3 h
Battery Type:	LiFePo4
Battery Current:	2000 mA
Battery Charge Duration:	12 h
Initial Charge Duration:	24 h
Charging Power Consumption:	3.5 W
Battery Cell Quantity	2
Luminous Flux in Battery Mode:	480 lm
Standards for emergency luminaires:	DIN EN 60598-2-22, DIN EN 62034: 2012
Type of Packaging:	box
Weight incl. Packaging:	0.264 kg
Content Master Package:	50
Dimensions of Master Package:	420x330x356 mm
Weight Master Package:	14 kg
Product Line:	Advance Line
Warranty	2 years

Information and Downloads:

Änderungen vorbehalten
Technical details are subject to change
(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de

Customs Tariff Number:	9405119090
Certifications	CE
Incll. LiFePo4 Battery 1800/3600mAh 3,2-3,6V 250mA	
EN: 60598-2-22, EN61347-1, EN61347-1 und -2-7	
Emergency Time: 1,5-3h	
Charging time: 24h	
3W Battery Emergency Power / 540lm masx,	