


# Tridonic TALEXXconverter LC 17W 250–700mA flexC SC EXC

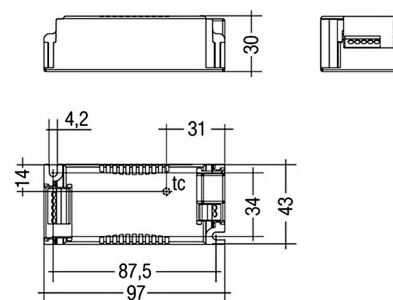

## Technical Details:

|                                    |                                                |
|------------------------------------|------------------------------------------------|
| Input Current:                     | AC 198 - 264V, 94mA, 50/60Hz,<br>DC 176 - 280V |
| Power Consumption:                 | 20 W                                           |
| Driver Manufacturer:               | Tridonic                                       |
| Power Factor (PF):                 | >0.95                                          |
| Input Driver:                      | terminal                                       |
| Output of Driver:                  | DC 15-50V, 250–700mA                           |
| CC/CV:                             | CC                                             |
| Output Current Adjustable:         | ✓                                              |
| Switching Cycles:                  | >100.000                                       |
| Compatible with Emergency Current: | ✓                                              |
| Ambient Temperature (TA):          | -25°C - 50°C                                   |

|                                             |               |
|---------------------------------------------|---------------|
| Dimensions:                                 | 97x43x30 mm   |
| IP Class:                                   | 20            |
| Housing Color                               | white         |
| Housing Material:                           | Polycarbonat  |
| Net Weight:                                 | 93 g          |
| Type of Packaging:                          | box           |
| Content Master Package:                     | 10            |
| Warranty                                    | 5 years       |
| Operating Hours:                            | 100.000 h     |
| Disposal Obligation:                        | ✓             |
| Customs Tariff Number:                      | 8504408390    |
| Certifications                              | CE,ENEC,SELV  |
| Barcode:                                    | 9006210526096 |
| Connection:                                 | Terminal      |
| Ausgangsstromanpassung über Widerstandsplug |               |

## Information and Downloads:

