


Tridonic TALEXXconverter LCA 10W 150-400mA dim one4all SR PRE

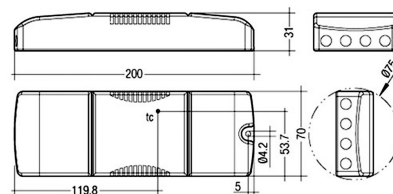

Technical Details:

Dimmable:	✓
Method of Dimming:	DALI, Push-Dim
Input Current:	AC 198 - 264V, 35-60mA, 50/60Hz, DC 176 - 280
Power Consumption:	13 W
Driver Manufacturer:	Tridonic
Power Factor (PF):	>0.96
Input Driver:	terminal
Output of Driver:	DC 15-40V, 150-400mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Compatible with Emergency Current:	✓
Loop-Through Cabling:	✓
Ambient Temperature (TA):	-25°C - 65°C

Dimensions:	200x70x31 mm
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	Through-wiring
Net Weight:	203 g
Type of Packaging:	box
Weight incl. Packaging:	0.256 kg
Content Master Package:	10
Warranty	5 years
Operating Hours:	100.000 h
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE, ENEC, SELV
Barcode:	9006210523576
Connection:	Terminal
Ausgangsstromanpassung über Widerstandsplug	

Information and Downloads:

