


Lifud GDE014YG 200-350mA Triac Dim Driver

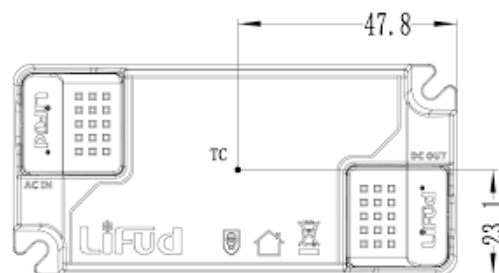

Technical Details:

Dimmable:	✓
Method of Dimming:	"Triac Phasenan-/abschnitt"
Input Current:	AC 198 - 264V, 350mA, 47/53Hz
Power Consumption:	14 W
Driver Manufacturer:	Lifud
Power Factor (PF):	>0.9
Input Driver:	terminal
Output of Driver:	DC 25-40V, 200-350mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-20°C - 55°C

Dimensions:	97x46x31 mm
Montageart:	surface mounted
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	Selectable output current
Net Weight:	92 g
Type of Packaging:	none
Weight incl. Packaging:	0.07 kg
Content Master Package:	90
Dimensions of Master Package:	380x295x215 mm
Weight Master Package:	7,34 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h TC<80°C
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE,TÜV,SELV
Power select: 200, 250, 300, 350mA 8-14W	
Power select with DIP switch	
Trailing-/Leading edge dim Triac	

Information and Downloads:

