


Lifud AAD040-1050-42 Dali-2

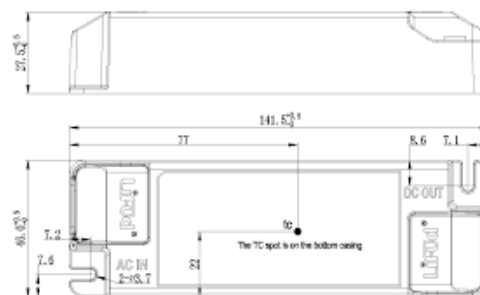

Technical Details:

Dimmable:	✓
Method of Dimming:	DALI, Push-Dim, DALI-2
Input Current:	AC 220 - 240V, 47/63Hz
Power Consumption:	40 W
Driver Manufacturer:	Lifud
Power Factor (PF):	>0.95
Input Driver:	terminal
Output of Driver:	DC 9-42V, 550-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-40°C - 60°C

Dimensions:	141x46,5x27,5 mm
Montageart:	surface mounted
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	Selectable output current
Net Weight:	86 g
Type of Packaging:	none
Weight incl. Packaging:	0.086 kg
Content Master Package:	60
Dimensions of Master Package:	390x290x210 mm
Weight Master Package:	8,3 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h TC<80°C
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE, TÜV, ENEC, SELV
Barcode:	4250557822228
ideal für Panels und Downlights	
Current select: 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000, 1050	
max. 40Watt	

Information and Downloads:

