


Lifud ADD040-1050-42 Dali-2

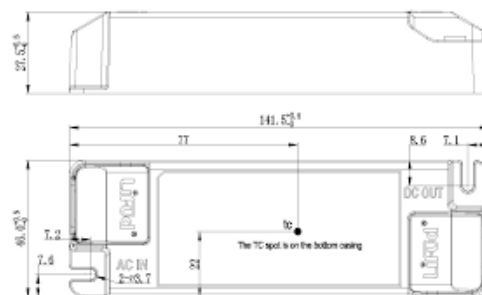

Technical Details:

Dimmable:	✓
Method of Dimming:	DALI,Push-Dim,DALI-2
Input Current:	AC 220 - 240V, 0,3mA, 47/63Hz
Power Consumption:	Power Select (28-40 W)
Driver Manufacturer:	Lifud
Power Factor (PF):	>0.97
Input Driver:	terminal
Output of Driver:	DC 9-40V, 700-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-40°C - 60°C

Dimensions:	145x46x27,5 mm
Montageart:	surface mounted
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	Selectable output current
Net Weight:	0.123 g
Type of Packaging:	none
Weight incl. Packaging:	0.123 kg
Content Master Package:	70
Dimensions of Master Package:	385x285x210 mm
Weight Master Package:	9,62 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h TC<80°C
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE,TÜV,ENEC,SELV
ideal für Panels und Downlights	
Current select: 700, 750, 800, 850,	
900, 950, 1000, 1050	
Effizienz 87%, Dimming range 1-100%	

Information and Downloads:

