


Kompakter Driver für Panel und Downlights

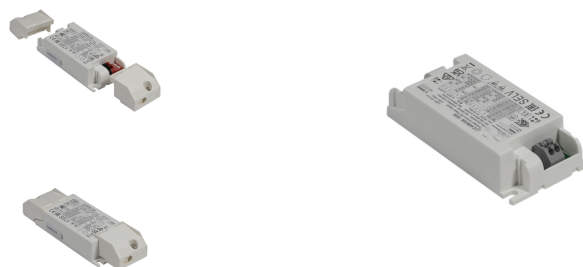

Technical Details:

Input Current:	AC 220-240V, 50/60Hz
Power Consumption:	30 W
Driver Manufacturer:	KGP
Power Factor (PF):	>0.92
Input Driver:	terminal
Output of Driver:	DC 25-42V, 350-700mA
CC/CV:	CC
Output Current Adjustable:	✓
Electrical Protection Class:	II
Ambient Temperature (TA):	-10°C bis +40°C
Storage Temperature:	-10°C bis +55°C

Dimensions:	137,5x43x27 mm
Montageart:	recessed
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	ohne Zuentlastung
Net Weight:	0.124 g
Content Master Package:	82
Weight Master Package:	11,29 kg
Product Line:	Advance Line
Warranty	5 years
Certifications	CE,ENEC,SELV
Power Select:	350-700mA in 50mA Schritte
	perfect for LED panels and downlights
	max. driver on 16A breaker: B Type: 23,C Type: 37

Information and Downloads:

