


Kompakter Driver für Panel und Downlights Triac Dim

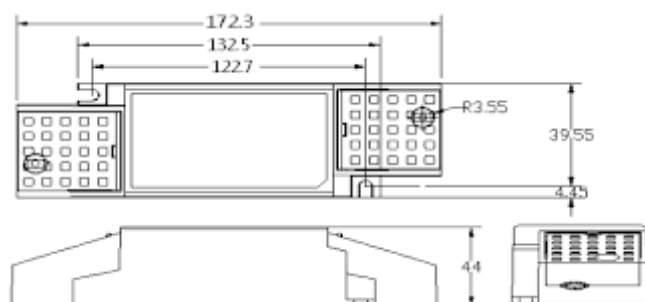

Technical Details:

Dimmable:	✓
Method of Dimming:	"Triac Phasen-/abschnitt"
Input Current:	AC 198-264V, 230mA, 50/60Hz
Power Consumption:	Power Select (26,6-39,9W W)
Driver Manufacturer:	KGP
Power Factor (PF):	>0.92
Input Driver:	terminal
Output of Driver:	DC 27-38V, 700-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	Terminal
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-40°C - 50°C

Dimensions:	132,5x44x30 mm
Montageart:	recessed
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	ohne Zuentlastung
Net Weight:	197 g
Weight incl. Packaging:	0.22 kg
Content Master Package:	75
Dimensions of Master Package:	450x240x200 mm
Weight Master Package:	14,78 kg
Product Line:	Advance Line
Warranty	5 years
Customs Tariff Number:	8504408390
Certifications	CE,ENEC,SELV
Power Select: 700-1050mA in 4 Schritte	
perfect for LED panels and downlights	
max. driver on 16A breaker: B Type: 7,C Type: 11	

Information and Downloads:

