


Kompakter, linearer Driver für Feuchtraumleuchten DALI

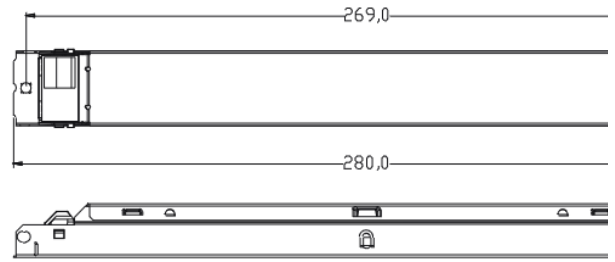

Technical Details:

Method of Dimming:	DALI,Push-Dim
Input Current:	AC 198-264V, 620mA, 50/60Hz, DC 180-280V
Power Consumption:	108 W
Driver Manufacturer:	KGP
Power Factor (PF):	>0.95
Input Driver:	terminal
Output of Driver:	DC 54-240V, 75-400mA
CC/CV:	CC
Output Current Adjustable:	✓
Electrical Protection Class:	I
Ambient Temperature (TA):	-25°C - 50°C
Storage Temperature:	-25°C - 85°C

Dimensions:	280x30x21 mm
Montageart:	recessed
IP Class:	20
Housing Color	white
Housing Material:	sheet metal
Special Feature of Housing:	ohne Zuentlastung
Net Weight:	164 g
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	100.000 h
Customs Tariff Number:	8504408390
Certifications	CE,ENEC,SELV
Power Select:	120-550mA via NFC
max. driver on 16A breaker:	B Type: 39,C Type: 62

Information and Downloads:

