


Kompakter Driver für Panel und Downlights Triac Dim

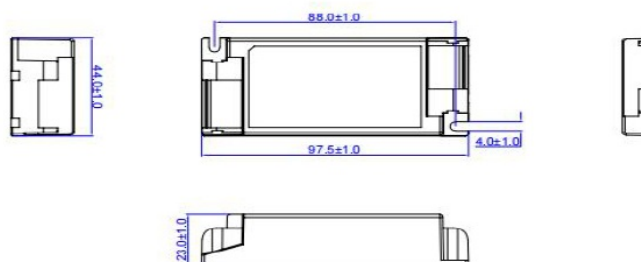

Technical Details:

Dimmable:	✓
Method of Dimming:	"Triac Phasen-/abschnitt"
Input Current:	AC 198-264V, 220mA, 50/60Hz
Power Consumption:	48 W
Driver Manufacturer:	KGP
Power Factor (PF):	>0.95
Input Driver:	terminal
Output of Driver:	DC 9-42V, 300-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	Terminal
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-25°C - 85°C

Dimensions:	98x44x23 mm
Montageart:	recessed
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	ohne Zugentlastung
Net Weight:	142 g
Weight incl. Packaging:	0.142 kg
Content Master Package:	80
Dimensions of Master Package:	457x250x220 mm
Weight Master Package:	12,06 kg
Product Line:	Advance Line
Warranty	5 years
Customs Tariff Number:	8504408390
Certifications	CE,ENEC,SELV
Barcode:	4250557828329
Power Select:	300-1050mA
perfect for LED panels and downlights	
max. driver on 16A breaker: B Type: 7,C Type: 11	

Information and Downloads:

