


# TM Safety ONTEC S M5 305 M DATA2 W, 576lm

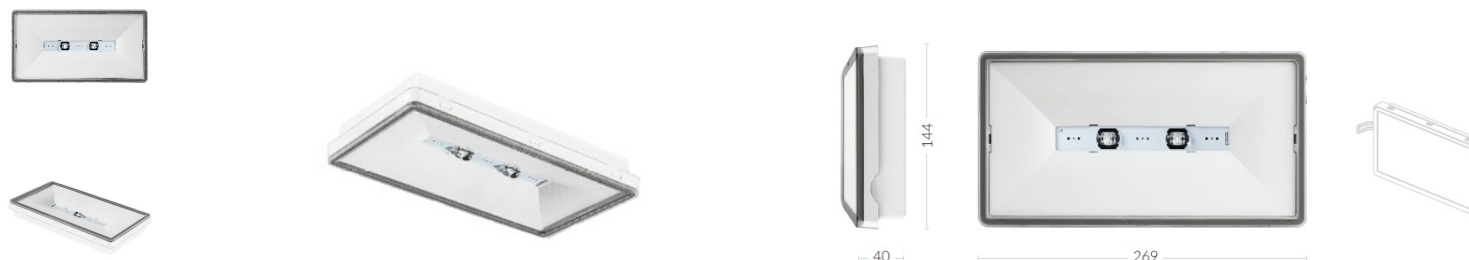

## Technical Details:

|                              |                      |
|------------------------------|----------------------|
| Luminous Flux:               | 576 lm               |
| LED Output:                  | 68 W                 |
| Light Yield:                 | 85 lm/W              |
| Light Temperature:           | 5700 K               |
| Light Color:                 | neutralwhite         |
| Color Rendering Index:       | ≥70 Ra               |
| Color Consistency (SDCM):    | <6                   |
| Beam Angle:                  | 120 °                |
| Light Emission:              | downward             |
| LED-Chip:                    | High-Power           |
| Ignition Time:               | <1 s                 |
| Input Current:               | AC 210-250V, 50/60Hz |
| Power Consumption:           | 7 W                  |
| Contains Driver:             | ✓                    |
| Input Driver:                | terminal             |
| Input Lamp:                  | Terminal             |
| Electrical Protection Class: | II                   |
| Ambient Temperature (TA):    | 0°C - 40°C           |
| Storage Temperature:         | -10°C - 50°C         |

|                                     |                                                  |
|-------------------------------------|--------------------------------------------------|
| Mounting:                           | ceiling,wall                                     |
| Montageart:                         | recessed                                         |
| IP Class:                           | 65                                               |
| IK Code:                            | 08                                               |
| Housing Color                       | white                                            |
| Housing Material:                   | PC                                               |
| Cover:                              | clear                                            |
| Luminaire Type:                     | Fluchtwegleuchtung                               |
| Testing Facility:                   | programmierter Selbsttest                        |
| Battery Warranty:                   | 2                                                |
| Discharge Duration:                 | ≥3 h                                             |
| Battery Type:                       | LiFePo4                                          |
| Battery Current:                    | 3000 mA                                          |
| Battery Charge Duration:            | 12 h                                             |
| Initial Charge Duration:            | 24 h                                             |
| Charging Power Consumption:         | 6.8 W                                            |
| Battery Cell Quantity               | 1                                                |
| Luminous Flux in Battery Mode:      | 576 lm                                           |
| Standards for emergency luminaires: | DIN EN 60598-2-22, Anforderung nach DIN EN 50172 |
| Certified By:                       | ENEC                                             |
| Type of Packaging:                  | box                                              |
| Product Line:                       | Premio Line                                      |
| Warranty                            | 5 years                                          |
| Operating Hours:                    | 50.000 h                                         |
| Disposal Obligation:                | ✓                                                |
| Certifications                      | CE,ENEC,D                                        |
| wetterfestes Gehäuse                |                                                  |

Information and Downloads:



