
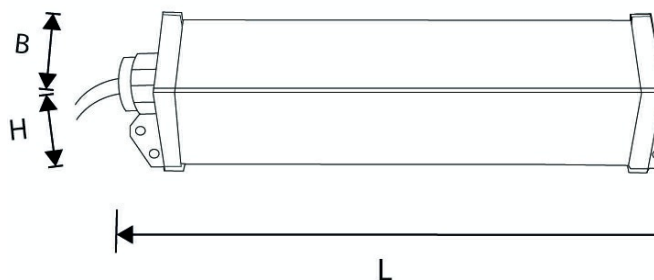


NOPA Batterie Notstromtreiber LV 6,6W IP65



Technical Details:

Input Current:	AC 220-240VV, 50/60Hz
Input Driver:	terminal
Output of Driver:	DC 10-55V, Konstant Leistung WmA
Input Lamp:	terminal
Electrical Protection Class:	I
Ambient Temperature (TA):	0°C - 45°C
Storage Temperature:	0°C - 50°C

Information and Downloads:



Dimensions:	300x53x52 mm
Montageart:	surface mounted
IP Class:	44
Housing Color	aluminium
Housing Material:	aluminum
Special Feature of Housing:	nur für Highbay geeignet
Luminaire Type:	Fluchtwegleuchtung
Testing Facility:	automatischer Selbsttest
Forward Voltage Range:	10-55V
Battery Warranty:	3
Discharge Duration:	≥1 h
Battery Type:	Li-Ion
Battery Current:	5000 mA
Battery Charge Duration:	8 h
Initial Charge Duration:	16 h
Charging Power Consumption:	5 W
Battery Cell Quantity	2
Standards for emergency luminaires:	DIN EN 60598-2-22, DIN EN 62034: 2012, Anforderung nach DIN EN 50172
Type of Packaging:	box
Product Line:	Advance Line
Warranty	3 years
Disposal Obligation:	✓
Customs Tariff Number:	9405499090
Certifications	CE,ENEC
Barcode:	4260733770182
Spannungsumschaltbereich: 130 - 170V AC <1 s	
Entladezeitraum: 1h bei 6,6W and 3h by 3W	
Umschaltweiche für CC- Treiber	

