
Technical Data Sheet


Order number: LG30796

LITEGEAR
LED Lighting Solutions

Cappila ECO 1200 20-830-2800lm internal wire through terminals



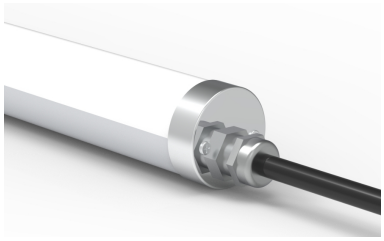



Technical Details:

Luminous Flux:	2800 lm
LED Output:	20 W
Light Yield:	140 lm/W
Light Temperature:	3000 K
Light Color:	warmwhite
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<4
Beam Angle:	120 °
LED-Chip:	SMD 2835
Ignition Time:	<0,5 s
Input Current:	AC 200 - 240V, 50/60Hz
Power Consumption:	20 W
Contains Driver:	✓
Power Factor (PF):	>0.95
CC/CV:	CC
Input Lamp:	cable with flying leads
Switching Cycles:	>200.000
Loop-Through Cabling:	✓
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-40°C - 60°C

Dimensions:	1200x45 mm
Length of Tube:	1200 mm
Mounting:	ceiling,wall
Montageart:	surface mounted
IP Class:	65
IK Code:	08
Housing Color	white
Housing Material:	Polycarbonat
Special Feature of Housing:	Tube
Cover:	opal
Net Weight:	769 g
Type of Packaging:	box
Weight incl. Packaging:	0.9 kg
Content Master Package:	16
Dimensions of Master Package:	1290x245x245 mm
Weight Master Package:	13,21 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h L80/B20
Disposal Obligation:	✓
Customs Tariff Number:	9405114090
Certifications	CE,LM80
Barcode:	4250557823911
Rohrleuchte	
Tube Light	
Edelstahlendkappen	
Durchgangsverdrahtung	
beidseitige Terminalklemmen	

Information and Downloads:

Änderungen vorbehalten
Technical details are subject to change
(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de