


# VERSALINK 1500 25-80W-840-4000-12500LM Flood 1-10V DIM

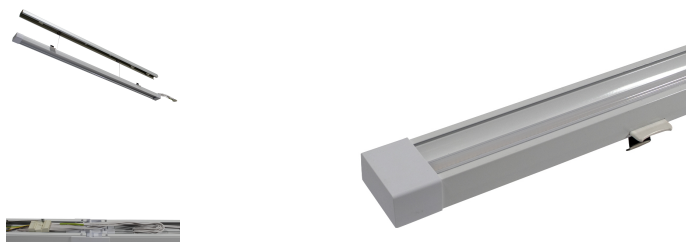

## Technical Details:

|                                    |                      |
|------------------------------------|----------------------|
| Luminous Flux:                     | 12500 lm             |
| Light Yield:                       | 156 lm/W             |
| Light Temperature:                 | 4000 K               |
| Light Color:                       | neutralwhite         |
| Color Rendering Index:             | ≥80 Ra               |
| Color Consistency (SDCM):          | <4                   |
| Beam Angle:                        | 90 °                 |
| Light Emission:                    | downward             |
| Dimmable:                          | ✓                    |
| Method of Dimming:                 | 1-10V                |
| LED-Chip:                          | SMD 2835             |
| Ignition Time:                     | <0,5 s               |
| Input Current:                     | AC 200-240V, 50/60Hz |
| Power Consumption:                 | 80 W                 |
| Contains Driver:                   | ✓                    |
| Driver Manufacturer:               | Lifud                |
| Power Factor (PF):                 | >0.95                |
| Input Driver:                      | terminal             |
| CC/CV:                             | CC                   |
| Output Current Adjustable:         | ✓                    |
| Input Lamp:                        | plug connector       |
| Switching Cycles:                  | >1.000.000           |
| Electrical Protection Class:       | I                    |
| Compatible with Emergency Current: | ✓                    |
| Ambient Temperature (TA):          | -20°C - 45°C         |
| Storage Temperature:               | -20°C - 55°C         |

|                                                     |                  |
|-----------------------------------------------------|------------------|
| Dimensions:                                         | 1531x69x36,5 mm  |
| Mounting:                                           | Decke            |
| Montageart:                                         | surface mounted  |
| IP Class:                                           | 20               |
| IK Code:                                            | 08               |
| Housing Color                                       | white            |
| Housing Material:                                   | aluminum         |
| Coating:                                            | powder-coated    |
| Special Feature of Housing:                         | PC Linse         |
| Cover:                                              | klar mit Linsen  |
| Net Weight:                                         | 1950 g           |
| Type of Packaging:                                  | box              |
| Weight incl. Packaging:                             | 1.95 kg          |
| Product Line:                                       | Advance Line     |
| Warranty                                            | 5 years          |
| Operating Hours:                                    | 50.000 h L80/B10 |
| Disposal Obligation:                                | ✓                |
| Customs Tariff Number:                              | 9405499090       |
| Certifications                                      | CE,LM80          |
| Barcode:                                            | 4250557819655    |
| Einfache Montage in 22 verschiedene Tragprofile     |                  |
| optionale Batterienotlichtmodule lieferbar          |                  |
| wählb. Ausgangsleistung: 25, 40, 50, 60, 70, 80W    |                  |
| 7-adrige Verdrahtung/7 wire cable tree              |                  |
| max. 30 Leuchten an einem 16A C Sicherungsautomaten |                  |

Information and Downloads:

