


Campa Flex Floodlight ASY450-840-66500LM

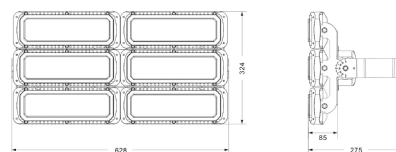

Technical Details:

Luminous Flux:	66500 lm
LED Output:	430 W
Light Yield:	148 lm/W
Light Temperature:	4000 K
Light Color:	neutralwhite
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<4
Beam Angle:	130x60 °
Unified Glare Rating (UGR):	<27
LED-Chip Manufacturer:	Lumileds
LED-Chip:	SMD 5050
Ignition Time:	<0,5 s
Input Current:	AC 100 - 265V, 50/60Hz
Power Consumption:	450 W
Contains Driver:	✓
Driver Manufacturer:	Meanwell
Power Factor (PF):	>0.95
Input Driver:	cable with flying leads
CC/CV:	CC
Input Lamp:	cable with flying leads
Switching Cycles:	>100.000
Electrical Protection Class:	I
Compatible with Emergency Current:	✓
Ambient Temperature (TA):	-20°C - 50°C
Storage Temperature:	-40°C - 55°C

Dimensions:	275x628x324 mm
Mounting:	ceiling,wall,ground
Montageart:	surface mounted
IP Class:	66
IK Code:	10
Housing Color	black
Housing Material:	aluminum
Coating:	powder-coated
Special Feature of Housing:	modular, swivelling
Cover:	Lens
Net Weight:	1470 g
Type of Packaging:	box
Weight incl. Packaging:	15.48 kg
Content Master Package:	1
Dimensions of Master Package:	675x395x205 mm
Weight Master Package:	15 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	100.000 h L80/B50
Disposal Obligation:	✓
Customs Tariff Number:	9405499090
Certifications	CE,ENEC,LM80
Barcode:	4250557813462
Meanwell® ELG-C Driver	
Akzo Nobel Beschichtung	

Information and Downloads:



