


SOLVELA 15-840-1600LM IP65

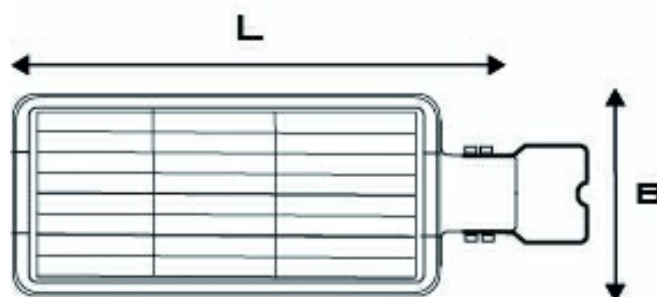

Technical Details:

Luminous Flux:	1600 lm
LED Output:	14 W
Light Yield:	107 lm/W
Light Temperature:	4000 K
Light Color:	neutralwhite
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<6
Beam Angle:	140x70 °
Light Emission:	downward
LED-Chip:	SMD 2835
Number of LED:	40
Ignition Time:	<1 s
Input Current:	DC 7,4V, 5,4AhmA
Power Consumption:	15 W
CC/CV:	CV
Input Lamp:	terminal
Switching Cycles:	>50.000
Ambient Temperature (TA):	-10°C - 40°C
Storage Temperature:	-10°C - 40°C

Dimensions:	413x232x58 mm
IP Class:	65
Housing Color	black
Housing Material:	ABS+PC, Alu Anti UV
Special Feature of Housing:	Sensor/Solarpanel
Cover:	Lens
Net Weight:	2208 g
Type of Packaging:	box
Weight incl. Packaging:	2.39 kg
Content Master Package:	8
Dimensions of Master Package:	550x270x550 mm
Weight Master Package:	20,03 kg
Product Line:	Essential Line
Warranty	2 years
Operating Hours:	35.000 h L80/B20
Disposal Obligation:	✓
Customs Tariff Number:	9405413100
Certifications	CE
Barcode:	4250557819686
Mastaufnahme Ø: 50 mm Solarpanel: (9,5Wp/7,4V)	
adjustable LED-Module, charging time 6h/day	
integrierter Bewegungssensor mit Dimmung/Standby	
integrated motion sensor 120° <12m	
Li-ion battery: 18650/7,4V/5400Ah replaceable	

Information and Downloads:

