


# Cetara Vario MKIV Square 6262 36-830/865-4000LM BAP

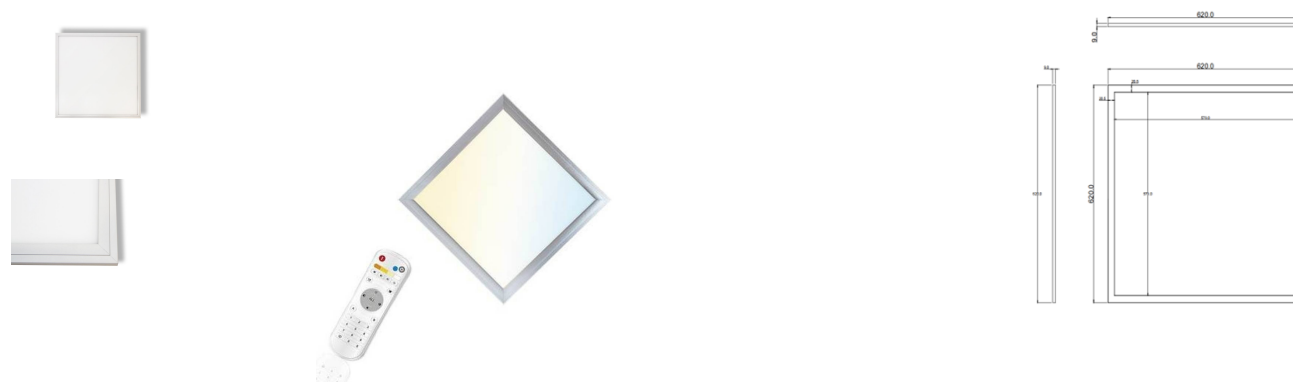

## Technical Details:

|                              |                         |
|------------------------------|-------------------------|
| Luminous Flux:               | 4000 lm                 |
| LED Output:                  | 36 W                    |
| Light Yield:                 | 122 lm/W                |
| Light Temperature:           | 3000-6500 K             |
| Light Color:                 | dualwhite               |
| Color Rendering Index:       | ≥80 Ra                  |
| Color Consistency (SDCM):    | <3                      |
| Beam Angle:                  | 90 °                    |
| Unified Glare Rating (UGR):  | <19                     |
| Light Emission:              | downward                |
| Dimmable:                    | ✓                       |
| Method of Dimming:           | Funk                    |
| LED-Chip Manufacturer:       | SANAN                   |
| LED-Chip:                    | SMD 4014                |
| Number of LED:               | 216                     |
| Ignition Time:               | <0,5 s                  |
| Power Consumption:           | 36 W                    |
| Contains Driver:             | ✓                       |
| Driver Manufacturer:         | TIGI                    |
| Power Factor (PF):           | >0.9                    |
| Input Driver:                | cable with flying leads |
| Output of Driver:            | DC 20-42V, 550-1100mA   |
| CC/CV:                       | CC                      |
| Input Lamp:                  | plug connector          |
| Switching Cycles:            | >50.000                 |
| Electrical Protection Class: | II                      |
| Ambient Temperature (TA):    | -30°C - 45°C            |
| Storage Temperature:         | -30°C - 80°C            |

|                                                     |                   |
|-----------------------------------------------------|-------------------|
| Dimensions:                                         | 620x620x9 mm      |
| Mounting:                                           | Decke             |
| Montageart:                                         | recessed          |
| IP Class:                                           | 20 (40 room side) |
| IK Code:                                            | 07                |
| Housing Color                                       | white             |
| Housing Color (RAL Code):                           | similar 9016      |
| Housing Material:                                   | aluminum          |
| Coating:                                            | powder-coated     |
| Cover:                                              | prismatic         |
| Net Weight:                                         | 2420 g            |
| Type of Packaging:                                  | box               |
| Dimensions of Packaging:                            | 655x705x20        |
| Weight incl. Packaging:                             | 3.15 kg           |
| Content Master Package:                             | 5                 |
| Dimensions of Master Package:                       | 655x705x20 mm     |
| Weight Master Package:                              | 16,8 kg           |
| Product Line:                                       | Premio Line       |
| Warranty                                            | 5 years           |
| Operating Hours:                                    | 124.000 h L80/B10 |
| Disposal Obligation:                                | ✓                 |
| Customs Tariff Number:                              | 9405119090        |
| Certifications                                      | CE                |
| Barcode:                                            | 4250557826028     |
| Farbtemperatur: 2700K(warmwhite) - 6500K(kaltwhite) |                   |
| mediums Funkfernbedienung veränderbar               |                   |
| CCT change: from 3000 to 6500 Kelvin with remote    |                   |

