
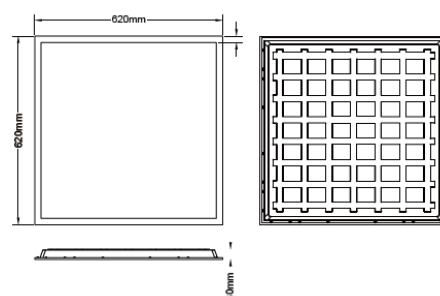



Lucello Multi-CCT BL-Panel 6262-40-830/850-4800LM BAP UGR 19

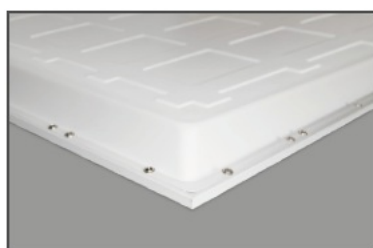

Technical Details:

Luminous Flux:	4800 lm
LED Output:	40 W
Light Yield:	120 lm/W
Light Temperature:	3000,4000, 5000 K
Light Color:	CCT Select
Color Rendering Index:	≥90 Ra
Color Consistency (SDCM):	<6
Beam Angle:	90 °
Unified Glare Rating (UGR):	<19
Light Emission:	downward
LED-Chip:	SMD 2835
Ignition Time:	<0,5 s
Input Current:	AC 220-240V, 50/60Hz
Power Consumption:	Power Select (28,32,36,40 W)
Contains Driver:	✓
Driver Manufacturer:	Micromile MM-2092C-1050-B
Power Factor (PF):	>0.9
Input Driver:	cable with flying leads
Output of Driver:	DC 28-40V, 850-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	plug connector
Switching Cycles:	>30.000
Electrical Protection Class:	II
Loop-Through Cabling:	✓
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-30°C - 80°C

Dimensions:	620x620x30 mm
Mounting:	Decke
Montageart:	surface mounted
IP Class:	40 (40 room side)
IK Code:	04
Housing Color	white
Housing Material:	Stahl+Alu+PS
Coating:	powder-coated
Cover:	prismatic
Net Weight:	1470 g
Type of Packaging:	box
Content Master Package:	6
Dimensions of Master Package:	675x240x675 mm
Weight Master Package:	10,67 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h L80/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405119090
Certifications	CE,ENEC
Barcode:	4250557827773
Bildschirmarbeitsplatz tauglich nach EN 12464-1	
CCT-Select: schaltbare Lichtfarbe 3000, 4000,5000K	
Aufbauleuchte/surface mount panel	
Backlite Technology 120lm/W typ.	
OneFitAll, Power Select: 28,32,36,40 Watt	

Information and Downloads:

