


# Lareda 30-940-3150LM DALI WH

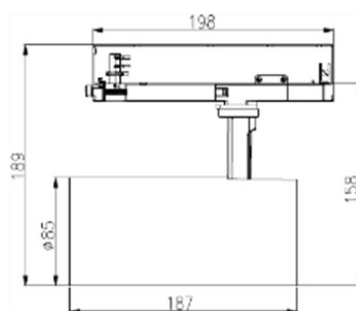

## Technical Details:

|                              |                        |
|------------------------------|------------------------|
| Luminous Flux:               | 3150 lm                |
| LED Output:                  | 28 W                   |
| Light Yield:                 | 105 lm/W               |
| Light Temperature:           | 4000 K                 |
| Light Color:                 | neutralwhite           |
| Color Rendering Index:       | ≥90 Ra                 |
| Color Consistency (SDCM):    | <4                     |
| Beam Angle:                  | 36 °                   |
| Swappable Reflector:         | ✓                      |
| Unified Glare Rating (UGR):  | <17                    |
| Light Emission:              |                        |
| Dimmable:                    | ✓                      |
| Method of Dimming:           | DALI                   |
| LED-Chip Manufacturer:       | Bridgelux              |
| LED-Chip:                    | COB                    |
| Number of LED:               | 1                      |
| Ignition Time:               | <0,5 s                 |
| Input Current:               | AC 220 - 240V, 50/60Hz |
| Power Consumption:           | 30 W                   |
| Contains Driver:             | ✓                      |
| Driver Manufacturer:         | Powergear              |
| Power Factor (PF):           | >0.95                  |
| Input Driver:                | lighting track         |
| Output of Driver:            | DC 30-42V, 500-700mA   |
| CC/CV:                       | CC                     |
| Output Current Adjustable:   | ✓                      |
| Input Lamp:                  | Power rail             |
| Switching Cycles:            | >50.000                |
| Electrical Protection Class: | II                     |
| Ambient Temperature (TA):    | 0°C - 35°C             |

|                                       |                         |
|---------------------------------------|-------------------------|
| Dimensions:                           | 208x85x184 mm           |
| Mounting:                             | Decke,Wand,Stromschiene |
| Montageart:                           | surface mounted         |
| Pivot Range pan:                      | 350 °                   |
| Pivot Range tilt:                     | 90 °                    |
| IP Class:                             | 20                      |
| Housing Color                         | white                   |
| Housing Material:                     | aluminum                |
| Coating:                              | powder-coated           |
| Special Feature of Housing:           | 3-Phase Track Adapter   |
| Cover:                                | Lens                    |
| Net Weight:                           | 1017 g                  |
| Type of Packaging:                    | box                     |
| Dimensions of Packaging:              | 215x100x195             |
| Weight incl. Packaging:               | 1.113 kg                |
| Content Master Package:               | 24                      |
| Dimensions of Master Package:         | 810x670x280 mm          |
| Weight Master Package:                | 26,16 kg                |
| Product Line:                         | Advance Line            |
| Warranty                              | 3 years                 |
| Operating Hours:                      | 30.000 h L80/B20        |
| Disposal Obligation:                  | ✓                       |
| Customs Tariff Number:                | 9405499090              |
| Certifications                        | CE,LM80                 |
| Barcode:                              | 4250557818504           |
| perfekte Blendungsbegrenzung          |                         |
| für Wohnraum, Museum, Shop oder Deko  |                         |
| max. 25 Spots auf einer 16A Sicherung |                         |
| Dali dimming                          |                         |

