


# Lareda MKII 12-930-985LM WH TRIAC DIM

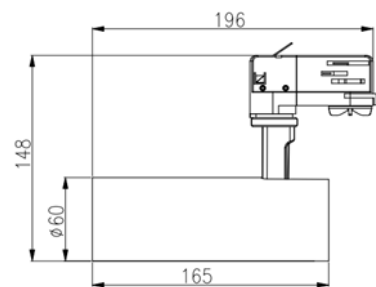

## Technical Details:

|                              |                           |
|------------------------------|---------------------------|
| Luminous Flux:               | 985 lm                    |
| LED Output:                  | 11 W                      |
| Light Yield:                 | 82 lm/W                   |
| Light Temperature:           | 3000 K                    |
| Light Color:                 | warmwhite                 |
| Color Rendering Index:       | ≥90 Ra                    |
| Color Consistency (SDCM):    | <4                        |
| Beam Angle:                  | 36 °                      |
| Unified Glare Rating (UGR):  | <16                       |
| Light Emission:              |                           |
| Dimmable:                    | ✓                         |
| Method of Dimming:           | "Triac Phasen-/abschnitt" |
| LED-Chip Manufacturer:       | Bridgelux                 |
| LED-Chip:                    | COB                       |
| Number of LED:               | 1                         |
| Ignition Time:               | <0,5 s                    |
| Input Current:               | AC 220 - 240V, 50/60Hz    |
| Power Consumption:           | 12 W                      |
| Contains Driver:             | ✓                         |
| Power Factor (PF):           | >0.56                     |
| Input Driver:                | lighting track            |
| Output of Driver:            | DC 30-42V, 300mA          |
| Input Lamp:                  | Power rail                |
| Switching Cycles:            | >100.000                  |
| Electrical Protection Class: | II                        |
| Ambient Temperature (TA):    | -10°C - 35°C              |
| Storage Temperature:         | -20°C - 55°C              |

|                                      |                         |
|--------------------------------------|-------------------------|
| Dimensions:                          | 196x60x148 mm           |
| Mounting:                            | Decke,Wand,Stromschiene |
| Montageart:                          | surface mounted         |
| Pivot Range pan:                     | 350 °                   |
| Pivot Range tilt:                    | 90 °                    |
| IP Class:                            | 20                      |
| Housing Color                        | white                   |
| Housing Material:                    | aluminum                |
| Coating:                             | powder-coated           |
| Special Feature of Housing:          | 3-Phase Track Adapter   |
| Cover:                               | Lens                    |
| Net Weight:                          | 482 g                   |
| Type of Packaging:                   | box                     |
| Dimensions of Packaging:             | 83*68*236               |
| Weight incl. Packaging:              | 0.525 kg                |
| Content Master Package:              | 24                      |
| Dimensions of Master Package:        | 500x280x256 mm          |
| Weight Master Package:               | 13,2 kg                 |
| Product Line:                        | Advance Line            |
| Warranty                             | 3 years                 |
| Operating Hours:                     | 30.000 h L80/B20        |
| Disposal Obligation:                 | ✓                       |
| Customs Tariff Number:               | 9405423990              |
| Certifications                       | CE,LM80                 |
| Barcode:                             | 4250557822815           |
| perfekte Blendungsbegrenzung         |                         |
| für Wohnraum, Museum, Shop oder Deko |                         |
| Phasen-/abschnitt Dimmung            |                         |

Information and Downloads:

