



BRI823-X-D-Z dimmbarer PIR Bewegungssensor für LED-Leuchten IP65

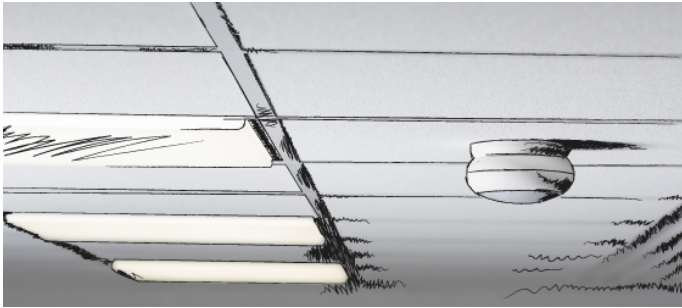

BRI823-X-D-Z

Product information "BRI823-X-D-Z dimmbarer PIR Bewegungssensor für LED-Leuchten IP65"

Radar Motion Sensor

Applications

PIR motion sensor for LED luminaires.

Perfect for the following applications:

- work spaces, warehouse
 - WCs, walkways
 - factory
-
- Operation technology: PIR sensor
 - Montagehöhe: 2,5 bis 12m
 - Detection range: max. 2-18m
 - Detection angle: 360° ceiling-
 - Hold time: 10s ~ 30min (adjustable)
 - Daylight threshold: 10~ 2000 Lux
 - Standby power: 0,9W
 - 0-10V Dimming
 - controllable via remote RC100

other details refer to datasheet.

Technical Details:

Power Consumption:	1 W
Operating Hours:	>30.000 h
Switching Cycles:	>10.000
Ambient Temperature (TA):	-20°C - 50°C
Housing Material:	plastic ABS/PC
Housing Color	white
Dimensions	169x62x114 mm
Warranty	3 years

Information and Downloads:

