



BRI819-B-O PIR-Bewegungssensor für LED-Leuchten IP20

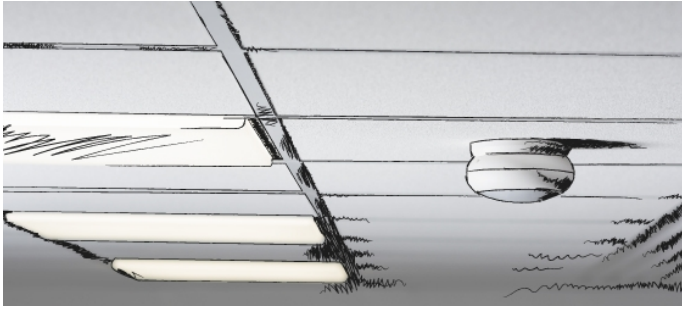

BRI819P-B-O



Product information "BRI819-B-O PIR-Bewegungssensor für LED-Leuchten IP20"

Radar Motion Sensor

Applications

Microwave radar motion sensor for LED luminaires.

Perfect for the following applications:

- work spaces, warehouse
- WCs, walkways
- factory

- Operation technology: PIR Infrared
- Montagehöhe: 2,5 bis 11m
- Detection range: max. 2-16m
- Detection angle: 360° ceiling-
- Hold time: 10s ~ 30min (adjustable)
- Daylight threshold: 10~ 2000 Lux
- Standby power: 0,5W
- controllable via remote

other details refer to datasheet.

Technical Details:

Power Consumption:	1 W
Operating Hours:	>30.000 h
Switching Cycles:	>10.000
Ambient Temperature (TA):	-10°C - 35°C
Housing Material:	plastic ABS/PC
Housing Color	white
Net Weight:	170 g
Warranty	3 years

Information and Downloads:

