

LITEGEAR INTERVENT WFC05 2,4G RF Controller/Dimmer 5 Channels RGBCCT

2.4GHz Wireless Transmission 4 Zone Control



Product information "LITEGEAR INTERVENT WFC05 2,4G RF Controller/Dimmer 5 Channels RGBCCT"

INTERVENT-SERIES: RF Receiver controller 5 channels RGB, RGBW, RGBCCT


- Wifi-, Bluetooth controller, Tuya, Smart Life App, Radio Frequency receiver 2,4GHz maximum operation distance: 30m
- Direct voice control: Amazon Alexa®, Google home®
- Wireless controller for 12-24V DC LED strip converter/dimmer max. 5 channels
- Easy Set-Up and operation
- Can be connected to several remotes and set up in Zones/groups.
- individual smooth dimming
- an additional power supply 12-24V DC is needed max. 1200mA
- 5 outputs max. 6A/Ch., total 15A
- Screw terminals

Applications:
Office, Shop and residential

- Controller 12-24V DC LED-Strip

controlled via RF remote 2,4G or Tuya, Smart Life App

compatible RF remotes see accessories!

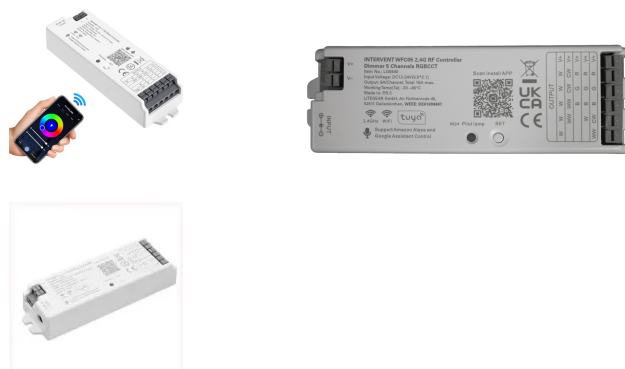

Technical Details:

Power Consumption:	360 W
Operating Hours:	>30.000 h
Switching Cycles:	>100.000
Ambient Temperature (TA):	-20°C - 45°C
Housing Material:	plastic
Housing Color	white
Zones:	1
Channels:	5
Dimming:	1-100%
Transmission Frequency:	2,4 GHz
Dimensions	122x38x22 mm
Net Weight:	60 g
Warranty	3 years

Information and Downloads:

