


Wireless Bluetooth Mesh Zhaga Book 18 Sensor IP65 High Bay Linse

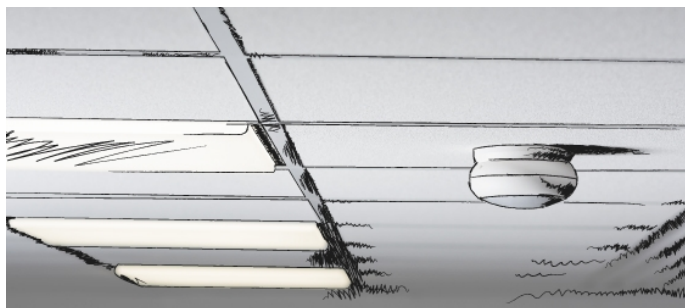

Product information "Wireless Bluetooth Mesh Zhaga Book 18 Sensor IP65 High Bay Linse"

PIR Motion Sensor with wireless Bluetooth Mesh

Applications

PIR motion sensor for LED luminaires.

Zhaga Book 18 Sockel für Schnittstelle

Perfect for the following applications:

- work spaces, warehouse
- WCs, walkways
- factory

- Operation technology: PIR sensor
- Swarm Function within Mesh
- Montagehöhe: 6 bis 12m
- Detection range: max. 9-24m
- Detection angle: 360° ceiling-
- Hold time: 10s ~ 30min (adjustable)
- Daylight threshold: 10~ 2000 Lux
- Standby power: 1W
- 0-10V Dimming
- Protocol: Meshle
- Steuerung via App

other details refer to datasheet.



For Indoor or Outdoor Use
Receptacle Sold Separately



View of Back of Device



View of Zhaga Book 18
Device Receptacle



Technical Details:

Power Consumption:	1 W
Operating Hours:	>50.000 h
Switching Cycles:	>10.000
Ambient Temperature (TA):	-40°C - 70°C
Housing Material:	plastic ABS/PC
Housing Color	grey
Warranty	3 years

Information and Downloads:

