


Wireless Bluetooth Mesh Zhaga Book 18 Sensor IP65 High Bay Linse, DALI

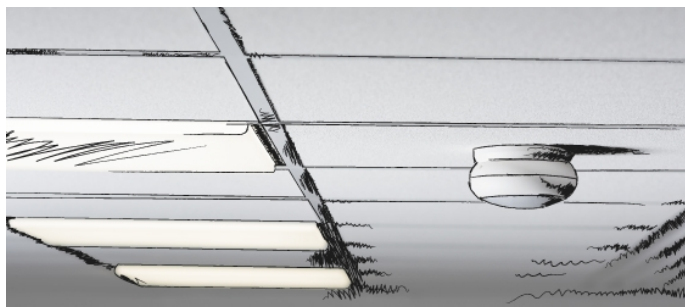

Product information "Wireless Bluetooth Mesh Zhaga Book 18 Sensor IP65 High Bay Linse, DALI"

PIR Motion Sensor with wireless Bluetooth Mesh

Applications

PIR motion sensor for LED luminaires.
 Zhaga Book 18 Socket for Schnittstelle

Perfect for the following applications:

- work spaces, warehouse
- WCs, walkways
- factory

- Operation technology: PIR sensor
- Swarm Function within Mesh
- Montagehöhe: 6 bis 12m
- Detection range: max. 9-24m
- Detection angle: 360° ceiling-
- Hold time: 10s ~ 30min (adjustable)
- Daylight threshold: 10~ 2000 Lux
- Standby power: 1W
- DALI Dimming
- Protocol: Meshle
- Steuerung via App

other details refer to datasheet.



For Indoor or Outdoor Use
 Receptacle Sold Separately



View of Back of Device



View of Zhaga Book 18
 Sensor Receptacle



Technical Details:

Power Consumption:	1 W
Operating Hours:	>50.000 h
Switching Cycles:	>10.000
Ambient Temperature (TA):	-40°C - 70°C
Housing Material:	plastic ABS/PC
Housing Color	white
Dimensions	78,7x45 mm
Warranty	3 years

Information and Downloads:

