


Phirna HighBay 150-850-21000LM

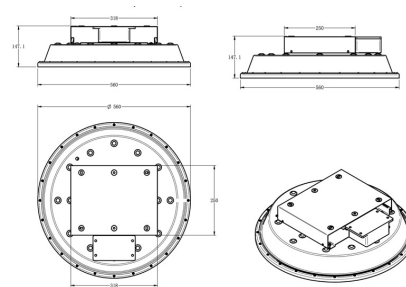

Technical Details:

Luminous Flux:	21000 lm
LED Output:	150 W
Light Yield:	140 lm/W
Light Temperature:	5000 K
Light Color:	daylight
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<6
Beam Angle:	110 °
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	1-10V,PWM
LED-Chip Manufacturer:	Everlight
LED-Chip:	SMD 2835
Number of LED:	648
Ignition Time:	<0,5 s
Input Current:	AC 220-240V, 50/60Hz
Power Consumption:	150 W
Contains Driver:	✓
Power Factor (PF):	>0.9
Input Driver:	cable with flying leads
Output of Driver:	DC 305-365V, 480mA
CC/CV:	CC
Input Lamp:	cable with flying leads
Switching Cycles:	>50.000
Electrical Protection Class:	II

Dimensions:	560x147,1 mm
Mounting:	Decke
Montageart:	surface mounted
IP Class:	65
IK Code:	08
Housing Color	white
Housing Material:	aluminum
Coating:	lacquered
Special Feature of Housing:	ALU + PC
Cover:	opal
Net Weight:	4206 g
Type of Packaging:	box
Dimensions of Packaging:	720x170x725
Weight incl. Packaging:	5.394 kg
Content Master Package:	1
Dimensions of Master Package:	720x170x725 mm
Weight Master Package:	5,56 kg
Product Line:	Advance Line
Warranty	3 years
Operating Hours:	35.000 h L70/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405499090
Certifications	CE,LM80
Barcode:	4250557812113
High Efficiency	
Perfect for Sports like Tennis	
Flickerfree	

Information and Downloads:



