



# BEG Aussen Bewegungsmelder RC-plus next 130

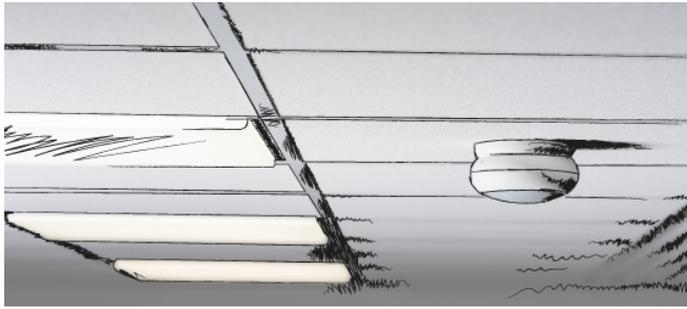

## Product information "BEG Aussen Bewegungsmelder RC-plus next 130"

Part No. 97001

### Product Information

- Motion detector with 130° detection area and anti-creep zone
- Mechanical range adjustment
- Different follow-up time depending on direction of movement
- Adjustable ball head
- Immediate operation using factory settings
- Additional functions can be set up using the optional remote control.
- Easy mounting thanks to plug base
- Wall, ceiling and corner mounting
- Factory settings 3 min and 20 lux
- Application examples: for narrow premises, walkways, gateways

### Technical Data

**Voltage:**

110 - 240 V AC 50 / 60 Hz (can also be supplied with other operating voltages ON request)

**Dimensions:**

121 x 71 x 85 mm

**Power consumption:**

approx. 0.5 W

**Detection area:**

horizontal 130°

**Range:**

max. 20 m across

max. 6 m towards

max. 4 m anti-creep

**Monitored area (tangential movement):**

225 m<sup>2</sup> / 2.5 m Mounting height

**Mounting height**

min./max./recommended:

2 m / 5 m / 2.5 m

**Degree / class of protection:**

IP54 / Class II

**Ambient temperature:**

-25 °C to +50 °C

**Housing:**

Polycarbonate, UV-resistant

**Channel 1 (lighting control) Switching power:**

Änderungen vorbehalten  
Technical details are subject to change  
(c) 2017

Litegear GmbH  
An Fürthenrode 45  
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0  
Fax: +49 (0)2451 48453-13  
www.litegear.de

## Technical Details:

Dimensions	121x85x71 mm
Net Weight:	380 g

### Information and Downloads:



max. inrush current IP (200  $\mu$ s) = 800 A

Type of contact:

$\mu$ -contact, 1 x NO contact with tungsten pre-make contact

Follow-up time:

15 sec - 16 min, Pulse

Switch-on threshold:

2 - 2000 Lux