
Product Information

Order number: LG10957A

Luna Plane IP66 Floodlight 50-840-6350lm





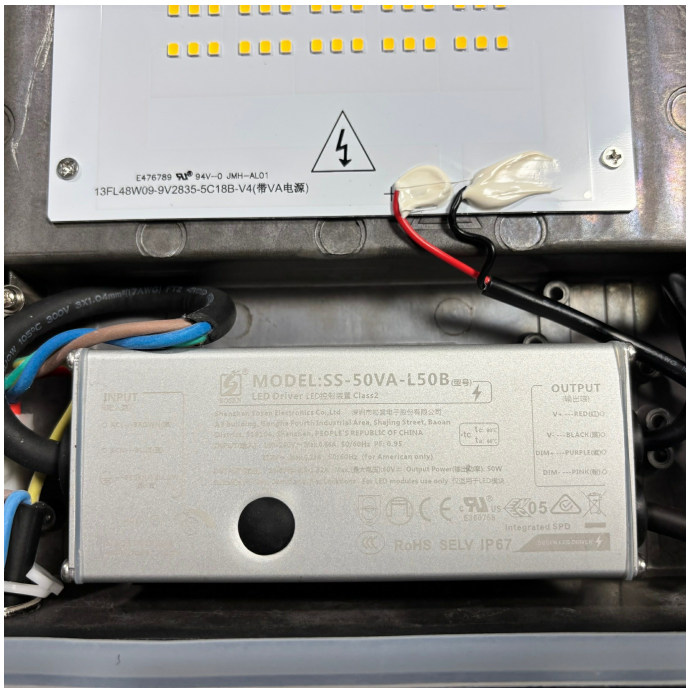



Technical Details:

Luminous Flux	6350 lm
Light Yield:	127 lm/W
Light Temperature:	4000 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	3
Power Consumption:	50 W
Power Factor (PF):	0.95
Operating Hours:	>50.000 h L70/B50
Switching Cycles:	>35.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-20°C - 50°C
Housing Material:	aluminum
Housing Color	black
Coating:	powder-coated
Dimensions	330x243x55 mm
Net Weight:	3008 g
Warranty	3 years

Product information "Luna Plane IP66 Floodlight 50-840-6350lm"

LED Flood Light

Litegear® Luna Plane is a flat and stylish LED outdoor floodlight. Due to the use of alluminum dicast housing, inox screws and alu bracket it has a excellent corrosion resistance. Much better than standard flood lights with steel brackets. Luna Plane is the perfect solution for use in factories, mobile for construction work, garden, parking area or for architectural applications. You can use it permanently outside in rough environment conditions. We use very efficient LED chips with a high lightoutput. The LED chips have a optimized heat dissipation to guarantee a long lifespan. Compared to other outdoor devices we have a much better Color rendering Index which let colors shine more naturally. After switching on the luminaire you have a instant full light without infrared waves which allows you to use it more closely to heat sensitive materials and makes working in front of the flood light more confenient and less sweatty. The internal power supply is power factor corrected for less waste of electricity.

Information and Downloads:

Änderungen vorbehalten
Technical details are subject to change
(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de