


RENOVIA 127/36-40-830/840-5400LM BAP, PMMA

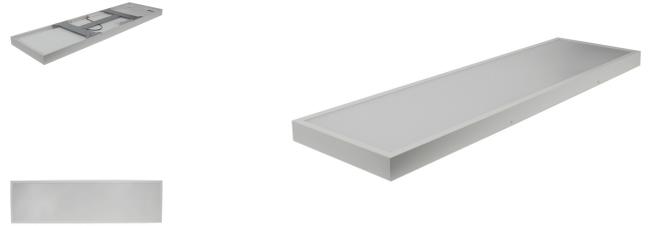

Technical Details:

Luminous Flux	5400 lm
Light Yield:	140 lm/W
Light Temperature:	3000, 3500, 4000 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	4
Power Consumption:	33, 36, 40 W
Power Factor (PF):	0.95
Operating Hours:	>70.000 h L80/B10
Switching Cycles:	>100.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-30°C - 45°C
Housing Material:	aluminum
Housing Color	white
Coating:	powder-coated
Dimensions	1270x360x55 mm
Net Weight:	4870 g
Warranty	5 years

Product information "RENOVIA 127/36-40-830/840-5400LM BAP, PMMA"

Surface mounting renovation luminaire

Renovia serves as a replacement for traditional surface mounted louver luminaires with fluorescent tubes. The larger housing can easily cover dirty edges outside the old luminaire housing, so no need for a complete ceiling coating.

Easy installation due to separate ceiling mount plate with electronic ballast and terminal. The LED light is simply hung in the holder, easy for service! Uniform, wide light distribution with low glare due to microprismatic optical material. Optical part made of UV and temperature-resistant polymethyl methacrylate (PMMA). Eye-friendly, flicker-free LED light. Long life electronic driver > 50,000 hours.

CCT-Selectlight colour selectable: 3000/4000 Kelvin
Power Select: 36, 38, 40W

Optionally available in dimmable version: Dali, Push-Dim, 1-10V, Radio, Zigbee

Available in 3 different sizes and power ranges.

Applications:

- Office, conference room, computer workstation BAP UGR < 19
- Laboratory, hospital, fitness center

Information and Downloads:



