


DURATA Advance 30-830/840-3600LM UP/DOWN UGR DALI 2 DIM

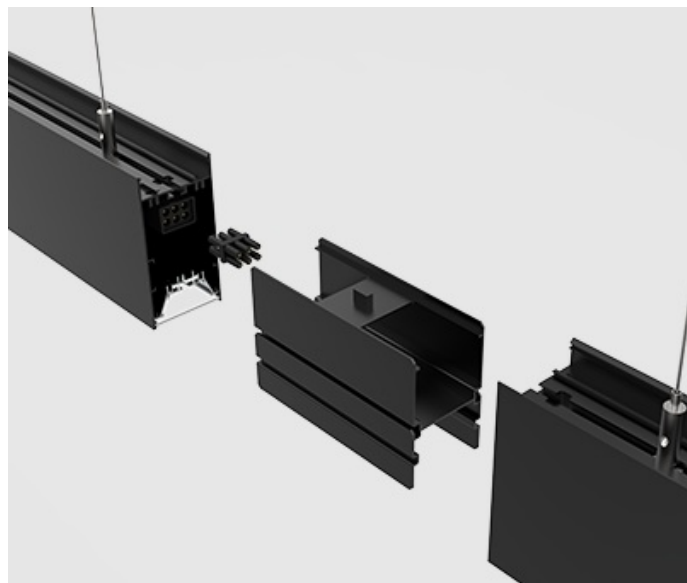

Product information "DURATA Advance 30-830/840-3600LM UP/DOWN UGR DALI 2 DIM"

Linear LED lighting system with direct and indirect light output

Durata Advance is a modular linear lighting system designed for modern office environments. Each module can be used as a standalone luminaire or combined to form a continuous line of light. Electrical and mechanical linear connectors can be ordered as optional accessories. While typically suspended via steel cables, the luminaire can also be mounted directly to the ceiling using clips (we recommend removing the indirect LED module for this type of installation). An integrated switch allows the color temperature to be selected from 3000K, 3500K, or 4000K.

The luminaire supports dimming via DALI DT6 signals. Power is supplied via an optional pluggable, angled cable from the ceiling. Thanks to its prismatic diffuser, Durata Advance offers glare control and meets the EN 12464-1 UGR19 standard for screen-based workstations.

The downward light output features a narrow beam angle, while the pluggable indirect LED module provides a wide beam angle (>110°).

- High-quality extruded aluminum profile with a sophisticated matte finish.
- Excellent system performance and efficiency: >125 lm/W.
- Selectable color temperature (warm white or neutral white) to suit your office or conference room.
- High visual comfort for screen-based workstations and uniform desk illumination.
- Includes 2 x 2m suspension cables; power cable and connectors not included.

Applications:

Offices, conference rooms, canteens, retail spaces, corridors, exhibition areas.



Technical Details:

Luminous Flux	3600 lm
Light Yield:	120 lm/W
Light Temperature:	3000, 3500, 4000 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	3
Power Consumption:	30 W
Power Factor (PF):	0.95
Operating Hours:	>60.000 h L80/B10
Switching Cycles:	>100.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-10°C - 40°C
Housing Material:	aluminum
Housing Color	black matt
Coating:	powder-coated
Dimensions	1200x50x100 mm
Net Weight:	3420 g
Warranty	5 years

Information and Downloads:

